

ISUZU FTS139-260

Flat Bed Truck 4X4

DIMENSIONS & SPECIFICATIONS

BROOKS HIRE

MAIN SPECIFICATIONS




TRUCK SPECIFICATIONS

Isuzu FTS 139-260 Auto 4 x 4
 5.0m x 2.4m Heavy Duty Steel Tray
 3mm Chequer Plate Floor
 1 x Toolboxes
 Handrails with Spring Return Gate
 Rubber Mudguards & Mudflaps
 Certified Hyd ROPS (Roll Over Protection System)
 Spare Wheel & Carrier
 Revolving Light to Ropes
 High Rise LED Lights to ROPS
 1 x 9kg Fire Extinguisher (Mounted to Module)
 1 x 1.5Kg Fire Extinguisher (Located in Cab)
 Lock Safe Battery Isolator and Starter Isolators (to be fitted to truck)
 Canvas Seat Covers
 Orange Safety Flag Whip Aerial
 UHF Radio (GME 3200)
 12V & 24V Jump Start Receptacles
 2 x Emergency Stops (1 x Inside Cab, 1 x Outside Cab)
 60-liter water tank
 Wheel Chocks (Mounted in Holding Bracket)
 Safety Triangles
 Window Tinting
 Mine Spec Reversing Alarm
 Reversing Camera
 Headlights (Low Beam) (Wired on with Ignition)
 First Aid Kit
 75mm Hi-Vis Striping
 Yellow Wheel Nut Guides
 Rubber Floor Mats
 Safety Decals
 Park Brake Alarm
 Tail Lift Safety rail


CRANE SPECIFICATIONS

990Kg Lifting Capacity At 1.2M
 4 Metre Full Extension
 310Kg Lifting Capacity At 4M
 Emergency Stop
 Slew Operator Protection
 Hose Burst Protection
 Valve Control Guard
 Load Indicator
 Compliance - AS1418-11-2014

Capacity Class	125Tm (122Knm)
Max. Lifting Capacity	990 @ 1.2m
Max. Hydraulic Outreach	3.00m
Max. Manual Outreach	4.00m
Lifting Height Above Base Std	4.10m
With Additional Boom	5.09m
Outreach Lifting Capacity	1.20m - 990kg
	2.10m - 606kg
	3.00m - 421kg
	4.00m - 310kg
Slewing Torque	1.75Knm
Slewing Angle	310°
Pump Capacity	4.9 > 7.0L/Min
Oil Tank Volume	3.0L
Working Pressure	2500 Psi
Weight Inc/ Power Pack and Oil	173Kg

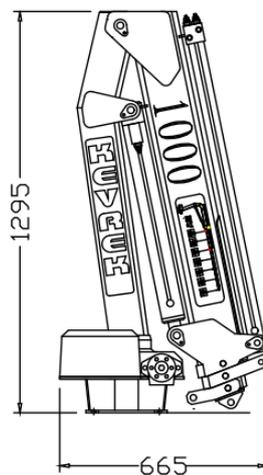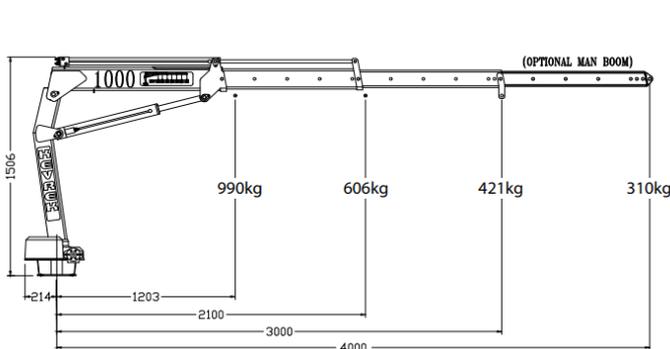

MOUNTING BASE PATTERN



5S MODEL (HYD SLEW)

